


WATER WELLS

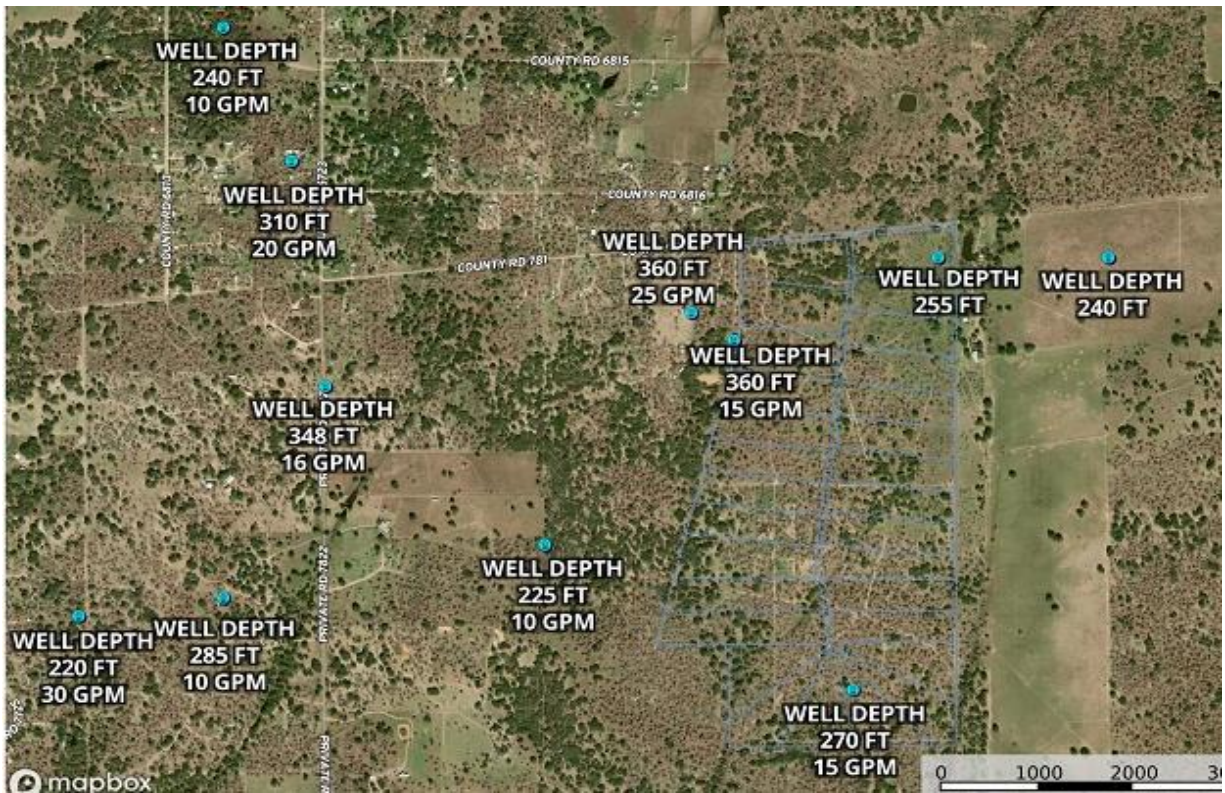

Well Done Water Works will mobilize to your site, rig up and drill an 8.75" borehole to 360ft total depth. Upon reaching total depth and circulating the hole clean the crew will install 320ft of 4.5" SDR 17 PVC casing and 40ft of 4.5" SDR 17 screen (.020) to allow for water entry. The screen area will then be gravel packed and the annular space will be sealed per state guidelines. A slab will be placed at surface and then the well will be jetted to clean out the drilling mud and develop the water production. Once the jetting is completed a 1HP/12gpm pump/motor combination will be installed with Schedule 80 1.25" drop pipe & 12-3 jacketed wire along with a 32-gallon pressure tank and ancillary surface equipment.

Subtotal: \$17,417.88

State Tax: \$578.80

Total: \$17,996.68

Well Done Water Works, LLC

458 CR 6611, Devine, TX 78016

Main: (877) 987-9355